


SPIRAL DRIVE ULTRASONIC SYSTEM FOR TUBE AND BAR INSPECTION

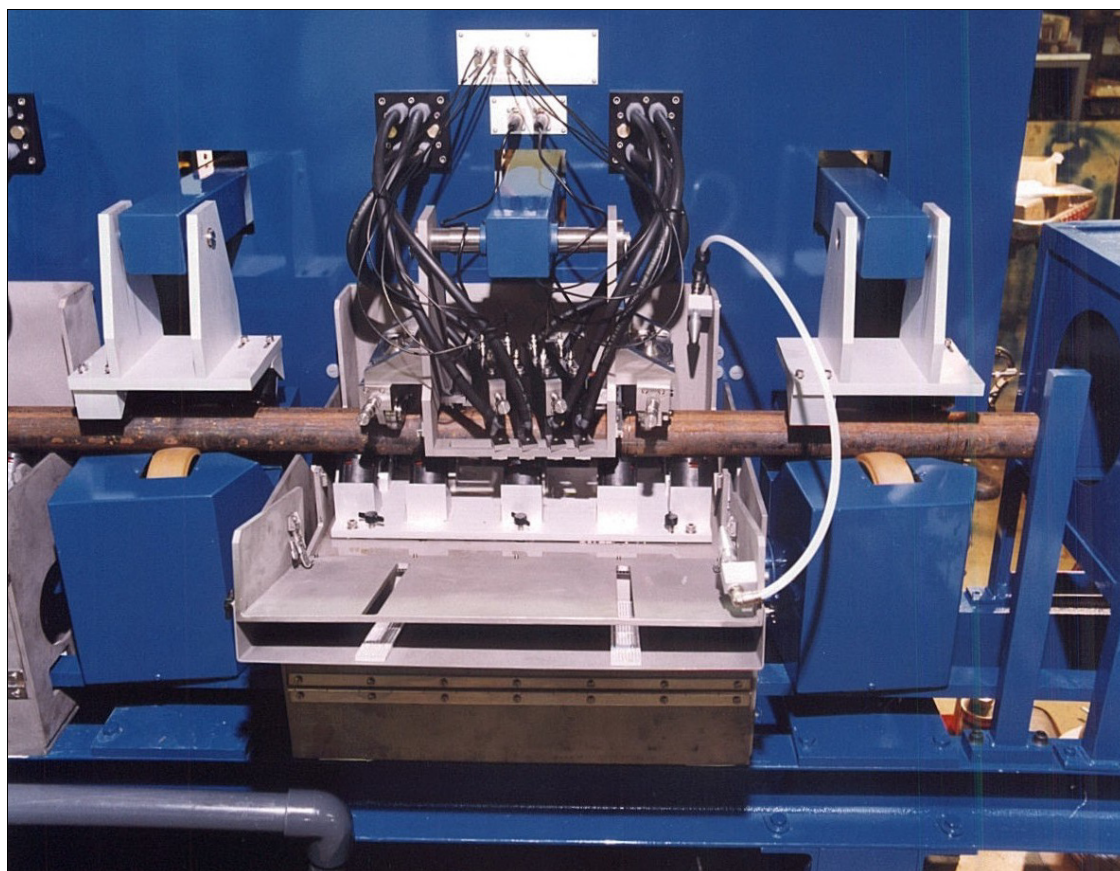

The purpose of this equipment is to provide both ultrasonic and eddy current inspection of tube and bar products. The ultrasonic inspection is achieved using a number of adjustable **Water Column Coupled Probe (WCCP)** units for shear wave longitudinal flaw detection and fixed **WCCP** unit for thickness monitoring. The eddy current inspection can be either a rotating eddy current probe or using differential probes mounted in holder. See the reverse of this brochure.

Diameter range 10mm to 300mm.

WCCP ultrasonic probe units.

**Longitudinal, oblique and transverse ultrasonic
shear wave testing.**

Compression wave testing.

Eddy current inspection for surface defects.



Telephone
+44 (0)1981 541122

Fax
+44 (0)1981 541133

Email
Sales@InsightNDT.com

Web Site
www.InsightNDT.com

**Insight NDT
Equipment Ltd**
The Old Cider Mill
Kings Thorn
Herefordshire
HR2 8AW

Directors
Mark Willcox BSc (Hons)
Jiang Li BSc (Hons)

VAT Registration No.
771 3060 50

Registration No.
4198815 England

Registered Office
21 St Owen Street, Hereford,
Herefordshire HR1 2JB

The **Spiral Test** systems rotate and advance a bar or tube through the central test area in which a series of test heads are located. The test heads incorporate **WCCP** type probe units for ultrasonic testing and can include eddy current probes for surface testing. The **WCCP** (**Water Column Coupled Probe**) units are designed to give a high signal to noise ratio without requiring immersion testing. The test heads ride on the product upper surface and give excellent access and ease of adjustments. Units are available for longitudinal, transverse and oblique ultrasonic shear wave testing, and also lamination and thickness ultrasonic compression wave testing. Multiple function test heads are readily configured for specific test requirements with up to ten **WCCP** units in each test head. The **WCCP** units may also be combined with an eddy current test for high sensitivity surface inspection. Adjustable oblique shear wave **WCCP** units are available. The compact configuration of the **WCCP** unit enables testing to less than 20mm from the product ends.

WCCP Ultrasonic Probe Units

The **WCCP** units have been developed to replace existing water jet type probe units and to obtain an inspection signal to noise ratio similar to immersion systems. Units have been supplied for longitudinal shear wave and compression wave inspection. In addition a mode conversion technique is available for inspecting the bores of low **Diameter/Thickness** ratio tubes using easily interchangeable probe top blocks.

The units are very compact and permit multi-probe heads to be configured using a simple modular construction. The latest **WCCP** twin units can configure ten probes in a 100mm length. The index between probes is selected to ensure full interlacing of probe scans. Standard multiple probe configurations have been defined such that full interleaving of probe scans is achieved for detection of a specific minimum flaw length or full ultrasonic coverage.

The **WCCP** units offer the following advantages:

- Units applied to product top surface to give easy access for setting up
- Good signal to noise ratio with performance similar to immersion systems
- Minimal adjustment when changing tube diameters
- No immersion tank required
- Inspect within 20mm of the product ends, with instantaneous coupling
- Incorporate end detection facilities using small receiver probes to monitor product position
- Supplied with probe top blocks to permit low **Diameter/Thickness** ratio tubes to be tested.

Mechanical Handling Systems

A range of spiraling tube and bar inspection systems are available, these can be configured for varying product diameters, lengths and weights.

Systems are available with:

- Bottom driven roll, top idler rolls for skew angles up to 21°
- Bottom idler roll, top driven rolls for skew angles up to 45°

The larger skew angles are normally used for small diameters requiring larger inspection helices.

A complete system typically comprises:

- Inlet roll down rack
- Stack catchment arms
- Automatic Load
- Spiral drive for the product with variable speed and helix
- Automatic unload to the left and right
- Single accept collector and twin reject collectors with diverter
- Central test area with provision for up to four individual test heads with elevating table, test head units, proximity detectors, top roll units, calibration standard rotate units
- re-circulating water system with purging and catchment, ultrasonic system only
- Optional paint marking system
- Electrical control desk with PLC unit for full facilities for automatic, manual and investigate flaw modes of operation